

## Application

- ▶ Pacer Endfold covers a wide range of residential and commercial applications.
- ▶ Leaves can be hung to the left or the right of an opening, or hung as floating units.
- ▶ In applications using an even number of leaves folding left, folding right and meeting in the centre of the opening, an offset hanger is required (Plan 4).
- ▶ For residential and commercial timber doors.

## Door Specification

Max door weight	75kg
Max door height	2700mm
Max door width	900mm
Door thickness	35-44mm

## Gear Specification

**Track:** 600 Aluminium  
Available in 2000mm, 3000mm, 4000mm and 6000mm lengths.

### Brackets:

Face fix (fixed at 500mm intervals)	1B
Joining bracket	1BX

### Hangers:

Four-wheeled hanger	21B/4
Four-wheeled offset hanger	21BO/4

### Pivots:

For door widths between 35-44mm	21B/P
---------------------------------	-------

### Guides:


Nylon end guide roller	21N/94
------------------------	--------

### Guide Channel:


Aluminium (2000, 3000, 4000 & 6000mm lengths)	94X
Brass (3000mm length only)	94
Polypropylene channel (2000, 3000, 4000 & 6000mm)	94P
Aluminium supporting channel for polypropylene (2000, 3000, 4000 & 6000mm)	94SC

### Optional Extras:

Flush pull	400
Flush bolts	454
Narrow flush bolt and keep	F3715 & F3734.

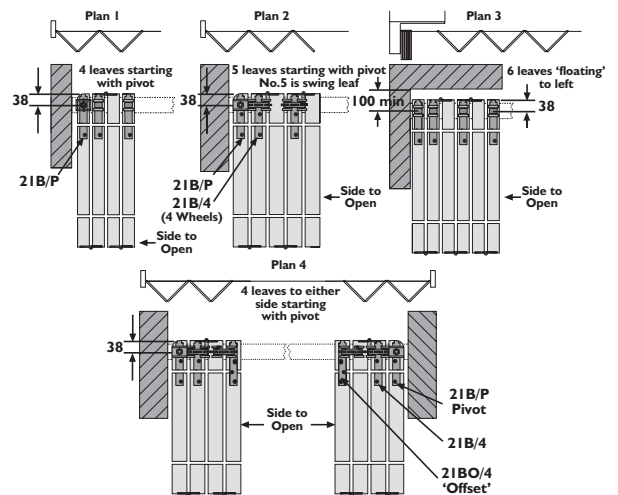

Note: Hangers and guides are to be fitted to alternate leaves only.

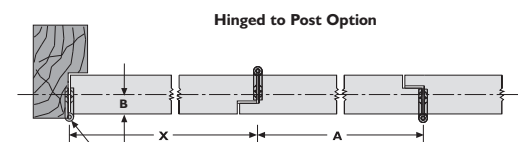

All leaves are of equal width except the leaf hinged to the post. The dimension for the leaf hinged to the post (X) is, A, less B (half the leaf thickness), less 38mm.

Formula:  $X = (A - B) - 38\text{mm}$

